



PLUME 10 AC RGBW

SPOT LIGHT SPT-PLUME 10 AC RGBW





Plume 10 AC RGBW is an exterior compact spotlight designed for accent and flood lighting applications. Utilize the luminaire to highlight, graze and beautify facades, bridges and magnitude of landscapes. Integrated power supply and control via on-board Casambi make controlling this spotlight wirelessly a total breeze.

POWER (AC)

10W

10W



BLK • Black Anodized



BRS • Brass Anodized



BNA • Brushed Natural Anodized

OPTICS



07D • 7° Beam



10D • 10° Beam



15D • 15° Beam



30D • 30° Beam



56D • 56° Beam



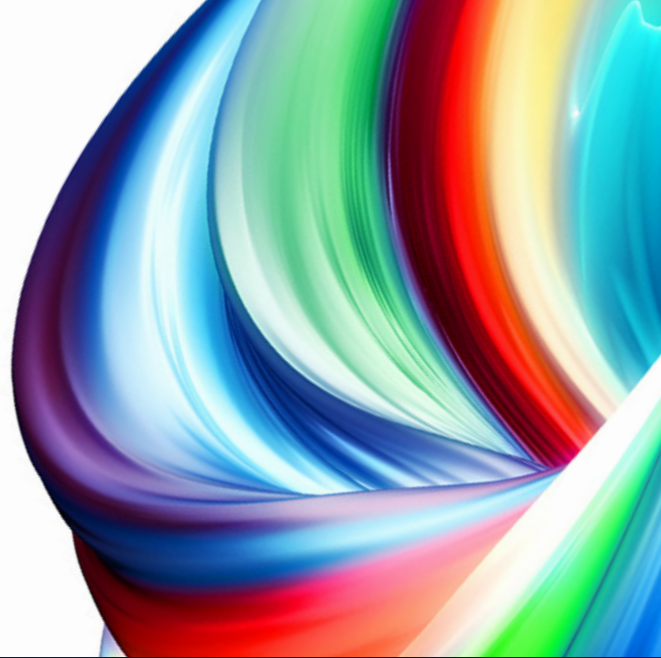
O3511D • Oval 35° x 11° Beam

RGBW FULL COLOUR



RGBW

Our RGBW quad chip delivers outstanding lumen output within a single chip, which is effectively collimated with precise and superior optics. Behold intensely saturated and uniform colour from this compact luminaire.



CASAMBI

Casambi Bluetooth offers wireless control of the Plume RGBW luminaire. Do away with sophisticated control systems by utilizing a smartphone and Casambi application. Simply set up and control the Plume RGBW as desired.

L70

LONG OPERATING LIFE

Coolon products use the world's most reputable LED manufacturers and the latest available standards to adequately report lumen maintenance. We strive to drive LEDs under their nominal current and use state-of-the-art heat dissipation methods, leading to durable electronics.



ADVANCED QUAD CHIP LEDS

Multi-colour LED that provides high lumen output in a small package. A small optical source for excellent optical control and efficient colour mixing can reduce LED system complexity by reducing the number of components required.

5
YEARS

5 YEARS WARRANTY

Coolon luminaires are covered by a solid comprehensive manufacturer's warranty that covers a range of possible defects and performance parameters throughout the duration of the warranty period.



PROUDLY MADE IN AUSTRALIA

Our products are designed and manufactured in Australia. Engineered to perfection, using only the highest quality components and highly skilled labour, each luminaire is assembled and thoroughly tested to ensure that it exceeds the highest standards.

TECHNICAL SPECIFICATIONS

Product Code	SPT- PLUME 10 AC RGBW
Lumen Output (White LED)	196 lm / 10D-SC
Nominal Power	10W
Description	Plume 10 AC RGBW Spotlight
Body	Aluminium Alloy Body
Finish	Brushed Natural / Brass / Black Anodised
Cover	Glass
Endcap	Polycarbonate
LEDs per Luminaire	1 unit / 4 in 1 RGBW LEDs
Input Voltage	120 – 250VAC
Input Frequency Range	47 – 63Hz
Inrush Current	Meets NEMA-410 requirements
Leakage Current	< 250 µA @ 250VAC
Max. Input Power	12W
Dimming / Control	Casambi
External Heatsink Required	No
Ambient Operating Temperature	Ta -10°C to 50°C
Reported Lumen Maintenance TM21-11 (@ Ts = 90°C, If = 1500mA)	PBED-20FTE-SRGBV L90 (6K) = 13,000 hours L70 (6K) > 33,000 hours Plume 10 AC RGBW max. operating values (@ Ts = 85°C, If = 1500mA)
IP Rating	IP66 (Standard) - Not including Connectors
IK Rating	IK07 (Standard) - Not including Wiring / Connector
Weight	800g



The Bluetooth radio signal from the devices can be limited by its surroundings (In some situations the range of a Bluetooth signal can be dramatically reduced if a device is installed in a metal enclosure, or if thick stone walls or other possible constructional restrictions are affecting the signal strength coming from the device).


POWER & LUMEN OUTPUT

PLUME RGBW SC	POWER	07D	10D	15D	30D	56D	O3511D
Red	5W	100 lm	108 lm	84 lm	77 lm	65 lm	101 lm
Green	5.8W	163 lm	176 lm	144 lm	125 lm	137 lm	200 lm
Blue	5.8W	50 lm	54 lm	46 lm	36 lm	37 lm	66 lm
White	5.8W	184 lm	196 lm	165 lm	146 lm	154 lm	248 lm
Yellow	9.3W	237 lm	261 lm	207 lm	187 lm	189 lm	274 lm
Magenta	9.5W	115 lm	125 lm	106 lm	98 lm	93 lm	146 lm
Cyan	10W	202 lm	219 lm	183 lm	158 lm	173 lm	260 lm


PLUME RGBW HM	POWER	07D	10D	15D	30D	56D	O3511D
Red	5W	60 lm	65 lm	50 lm	46 lm	39 lm	60 lm
Green	5.8W	105 lm	114 lm	93 lm	81 lm	89 lm	130 lm
Blue	5.8W	38 lm	41 lm	35 lm	27 lm	28 lm	50 lm
White	5.8W	117 lm	125 lm	105 lm	93 lm	98 lm	158 lm
Yellow	9.3W	141 lm	155 lm	123 lm	111 lm	112 lm	163 lm
Magenta	9.5W	83 lm	90 lm	76 lm	71 lm	67 lm	105 lm
Cyan	10W	135 lm	146 lm	122 lm	105 lm	115 lm	173 lm

DIMENSIONS

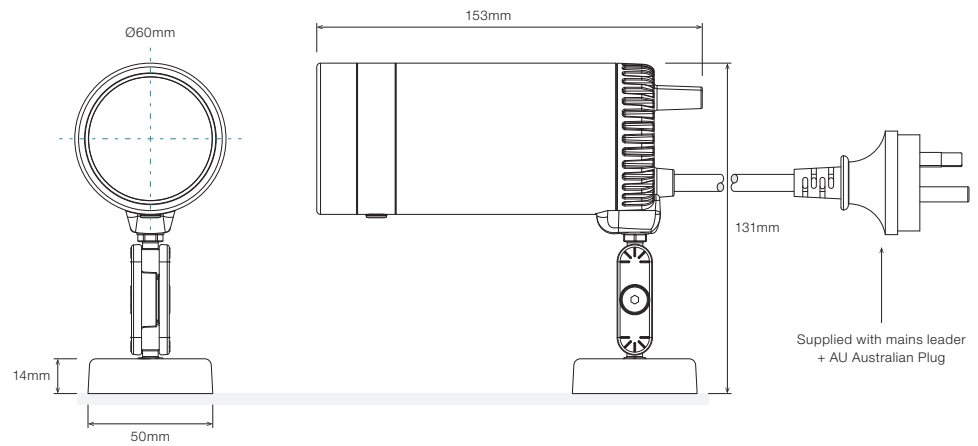
BALL JOINT MOUNTING BRACKET



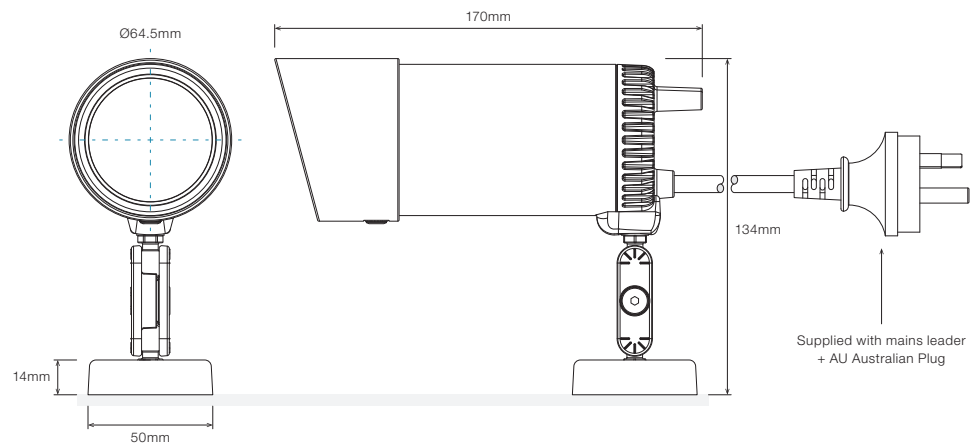BALL JOINT MOUNTING BRACKET WITH ANTI GLARE VISOR




BALL JOINT MOUNTING BRACKET ROTATION

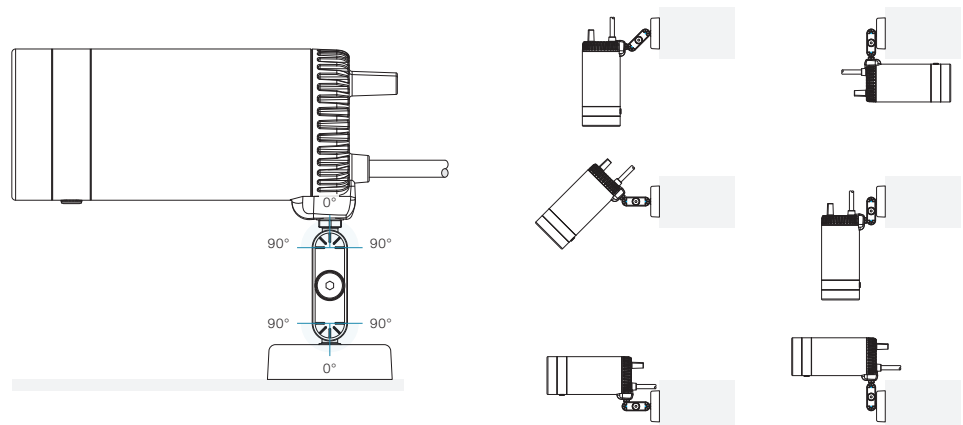


■ DIMENSIONS












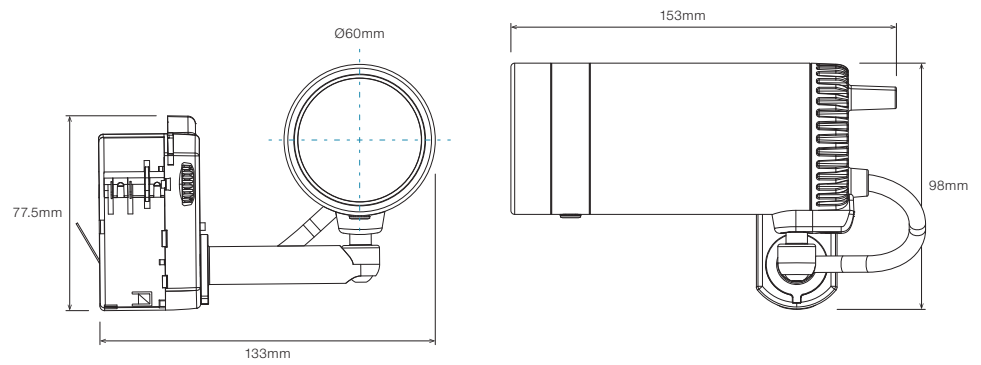
TRACK MOUNTING BRACKET



TRACK MOUNTING BRACKET ROTATION

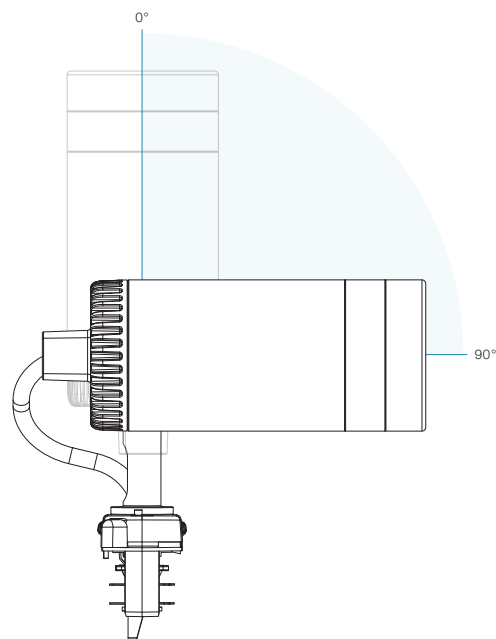

■ POLAR DISTRIBUTION

OPTIC	POLAR DISTRIBUTION	
07D Narrow Beam 7° Beam Angle		
10D Narrow Beam 10° Beam Angle		
15D Medium Beam 15° Beam Angle		
30D Medium Beam 30° Beam Angle		
56D Wide Beam 56° Beam Angle		
O3511D Oval Beam Oval 35° x 11° Beam Angle		


■ IP RATING

IP66

Fully protected against dust.
Protected against wave-like
water jets from all directions.

ORDERING EXAMPLE

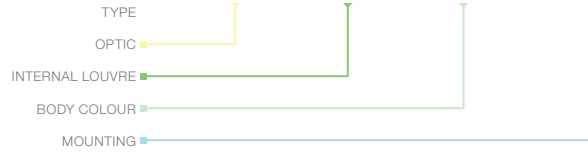SPT-PLUME 10 AC RGBW - 30D - HM - BLK - BJMB



■ OPTIC

07D	7° Beam (Far Throw Collimation)
10D	10° Beam
15D	15° Beam
30D	30° Beam
56D	56° Beam
O3511D	Oval 35° x 11° Beam

■ INTERNAL LOUVRE

SC	Standard Clear
HM	Honeycomb Mesh

■ BODY COLOUR

BLK	Black Anodized
BRS	Brass Anodized
BNA	Brushed Natural Anodized

■ MOUNTING

NA	No Mounting Included
BJMB	Ball Joint Mounting Bracket
TRMB	Track Mounting Bracket

ACCESSORIES

	PRODUCT CODE	DESCRIPTION
ACCESSORIES		
	ACC-PLUME-AGBL	Anti Glare Visor Black

