

ALTO CL

LED STRIP CHAIN MODULE STR-ALTO CL





Alto CL offers unprecedented flexibility. Short rigid modules with flexible connectors can be individually turned and twisted to achieve the most detailed designs. Its fluid flexibility and creative control make the Alto CL the perfect choice for curved cove lighting applications.

Installation has never been so simple.

POWER**LUMINOUS FLUX****5W**

4.6W / metre



500 lm / metre

POWER**LUMINOUS FLUX****10W**

9.4W / metre



1,000 lm / metre

POWER**LUMINOUS FLUX****15W**

14.0W / metre



1,500 lm / metre

COLOUR TEMPERATURE

2700K

3000K

4000K



CURVE RIGID STRIPS WITH EASE

Alto CL is a rigid chain LED fitting that has flexible connection in between modules, enabling use in curved coves and pelmets.

SIMPLIFIED INSTALLATION

Alto CL arrives pre-connected and ready to perform. Unpack. Connect. Enjoy. Installation has never been simpler.



LONG OPERATING LIFE

Coolon products use the world's most reputable LED manufacturers and the latest available standards to adequately report lumen maintenance. We strive to drive LEDs under their nominal current and use state-of-the-art heat dissipation methods, leading to durable electronics.



VARIOUS CCT & COLOUR BINNING CONSISTENCY

All products are offered in various colour temperatures, and manufactured using tighter bins, ensuring excellent consistency and uniformity.



5 YEARS WARRANTY

Coolon luminaires are covered by a solid comprehensive manufacturer's warranty that covers a range of possible defects and performance parameters throughout the duration of the warranty period.



PROUDLY MADE IN AUSTRALIA


Our products are designed and manufactured in Australia. Engineered to perfection, using only the highest quality components and highly skilled labour, each luminaire is assembled and thoroughly tested to ensure that it exceeds the highest standards.

TECHNICAL SPECIFICATIONS

	5W VERSION	10W VERSION	15W VERSION
Product Code	STR-ALTO CL 5W	STR-ALTO CL 10W	STR-ALTO CL 15W
Description	LED Strip Chain Module		
Segment Length (S)	180mm		
Segment Width	20.5mm		
LED Pitch	30.0mm		
LEDs Per Segment	6		
Operating Voltage	42VDC	42VDC	42VDC
Typical Power Consumption per Segment	0.84W per 180mm Segment	1.68W per 180mm Segment	2.52W per 180mm Segment
Typical Current	20mA per 180mm Segment	40mA per 180mm Segment	60mA per 180mm Segment
Colour Rendering Index (CRI)	80 (Standard) up to 90		
Dimmable	Through DRV-DALIPOINT-1X5A, DRV-DALIPOINT-IP-1X10A, or DRV-DIMMERPOINT-1X10A (sold separately)		
Effective Beam Angle	120°		
External Heatsink Required	No		
Ambient Operating Temp	Ta -10°C to 40°C		
Reported Lumen Maintenance TM21-11 (@ Ts = 55°C, If = 65mA)	L70 (12K) > 72,000 hours L90 (12K) = 59,000 hours		
	Alto CL max. operating values (@ Ts = 40°C, If = 60mA)		
IP Rating	IP20		
Approvals	CE, CB, RCM		
Max Continuous Connection Length	14.4m or 80 Segments	7.20m or 40 Segments	4.68m or 26 Segments
Luminous Flux per Metre (lm/M)	500 lm/Metre	1,000 lm/Metre	1,500 lm/Metre


▪ Specified values measured at 2700K, 42VDC

COLOUR BINNING

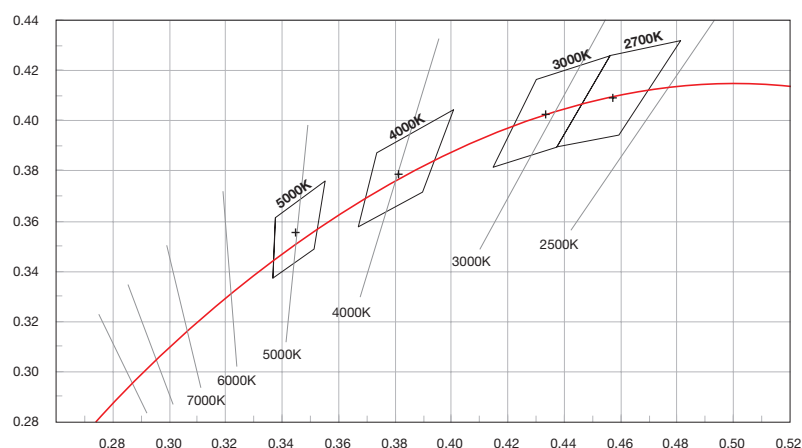

DIMENSIONS

For final strip lengths please refer to the "Product Length" table.

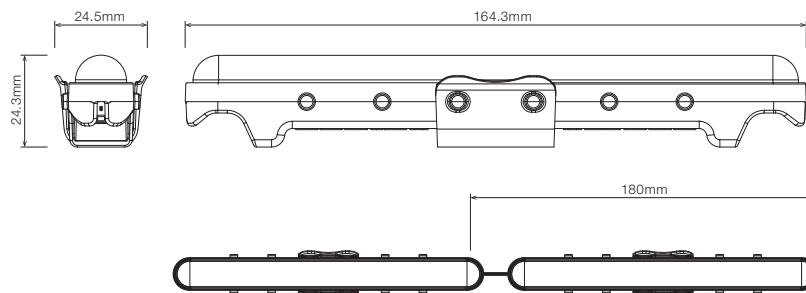

PRODUCT LENGTH

POWERED BY 42VDC

# OF MODULES	FINAL LENGTH
S1	180mm
S2	360mm
S3	540mm
S4	720mm
S5	900mm
S6	1,080mm
S7	1,260mm
S8	1,440mm
S9	1,620mm
S10	1,800mm
S11	1,980mm
S12	2,160mm
S13	2,340mm
S14	2,520mm
S15	2,700mm
S16	2,880mm
S17	3,060mm
S18	3,240mm
S19	3,420mm
S20	3,600mm
S21	3,780mm
S22	3,960mm
S23	4,140mm
S24	4,320mm
S25	4,500mm
S26	4,680mm
S27	4,860mm
S28	5,040mm
S29	5,220mm
S30	5,400mm
S31	5,580mm
S32	5,760mm
S33	5,940mm
S34	6,120mm
S35	6,300mm
S36	6,480mm
S37	6,660mm
S38	6,840mm
S39	7,020mm
S40	7,200mm

# OF MODULES	FINAL LENGTH
S41	7,380mm
S42	7,560mm
S43	7,740mm
S44	7,920mm
S45	8,100mm
S46	8,280mm
S47	8,460mm
S48	8,640mm
S49	8,820mm
S50	9,000mm
S51	9,180mm
S52	9,360mm
S53	9,540mm
S54	9,720mm
S55	9,900mm
S56	10,080mm
S57	10,260mm
S58	10,440mm
S59	10,620mm
S60	10,800mm
S61	10,980mm
S62	11,160mm
S63	11,340mm
S64	11,520mm
S65	11,700mm
S66	11,880mm
S67	12,060mm
S68	12,240mm
S69	12,420mm
S70	12,600mm
S71	12,780mm
S72	12,960mm
S73	13,140mm
S74	13,320mm
S75	13,500mm
S76	13,680mm
S77	13,860mm
S78	14,040mm
S79	14,220mm
S80	14,400mm

NOTE: 15W version only available up to S26. 10W version only available up to S40.

⚠ WARNING


PLEASE HANDLE LONG LED STRIPS WITH CARE.

When handling LED Strips, please ensure that they are all supported and not dragged from one end.



■ PROFILE COLOUR

BLK • Black (Standard)

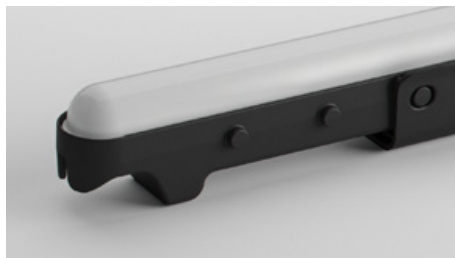

WHT • White



■ WIRING CONFIGURATION

CONNECTOR TYPE	DRAWING	MALE	FEMALE
WR2OS Wire 2 Core One Side			
SMPLC Sample Type Connector 2.5mm			

- Wiring Length 250mm.
- Please consult Coolon for details on extension cable between LED fittings, drivers and power supplies.

WIRING COLOUR CODE	
Red	+ VDC
Black	GND


■ IP RATING

IP20


Protected against solid objects greater than 12mm.
No protection against liquids.

■ INSTALLATION LIMITS


SCENARIO 1




SCENARIO 2

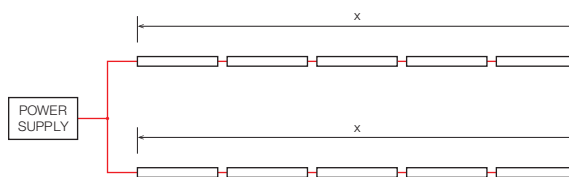

SCENARIO 3

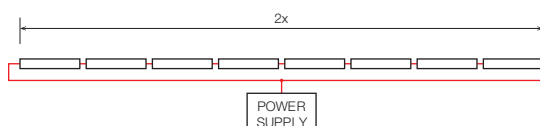

SCENARIO 4



5W VERSION

MAX. CONTINUOUS CONNECTION LENGTH (X)	SUPPLY VOLTAGE	NUMBER OF MODULES
14,400mm	42VDC	80

10W VERSION


MAX. CONTINUOUS CONNECTION LENGTH (X)	SUPPLY VOLTAGE	NUMBER OF MODULES
7,200mm	42VDC	40

15W VERSION

MAX. CONTINUOUS CONNECTION LENGTH (X)	SUPPLY VOLTAGE	NUMBER OF MODULES
4,680mm	42VDC	26

⚠ WARNING

Avoid connecting multiple power supplies into a single circuit, unless they are specifically designed to do so.

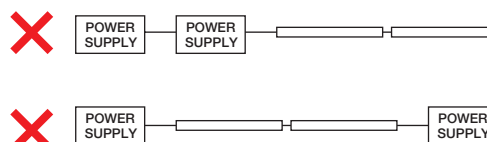

ORDERING EXAMPLE

STR - ALTO CL - 5W - 3.0K - S1 - BLK - WR2OS - IP20



PRODUCT LENGTH PAGE 05

S1	180mm	S41	7,380mm
S2	360mm	S42	7,560mm
S3	540mm	S43	7,740mm
S4	720mm	S44	7,920mm
S5	900mm	S45	8,100mm
S6	1,080mm	S46	8,280mm
S7	1,260mm	S47	8,460mm
S8	1,440mm	S48	8,640mm
S9	1,620mm	S49	8,820mm
S10	1,800mm	S50	9,000mm
S11	1,980mm	S51	9,180mm
S12	2,160mm	S52	9,360mm
S13	2,340mm	S53	9,540mm
S14	2,520mm	S54	9,720mm
S15	2,700mm	S55	9,900mm
S16	2,880mm	S56	10,080mm
S17	3,060mm	S57	10,260mm
S18	3,240mm	S58	10,440mm
S19	3,420mm	S59	10,620mm
S20	3,600mm	S60	10,800mm
S21	3,780mm	S61	10,980mm
S22	3,960mm	S62	11,160mm
S23	4,140mm	S63	11,340mm
S24	4,320mm	S64	11,520mm
S25	4,500mm	S65	11,700mm
S26	4,680mm	S66	11,880mm
S27	4,860mm	S67	12,060mm
S28	5,040mm	S68	12,240mm
S29	5,220mm	S69	12,420mm
S30	5,400mm	S70	12,600mm
S31	5,580mm	S71	12,780mm
S32	5,760mm	S72	12,960mm
S33	5,940mm	S73	13,140mm
S34	6,120mm	S74	13,320mm
S35	6,300mm	S75	13,500mm
S36	6,480mm	S76	13,680mm
S37	6,660mm	S77	13,860mm
S38	6,840mm	S78	14,040mm
S39	7,020mm	S79	14,220mm
S40	7,200mm	S80	14,400mm

WATTAGE PAGE 04

5W	4.6W per Metre
10W	9.4W per Metre
15W	14.1W per Metre

COLOUR TEMPERATURE ¹ PAGE 04

2.7K	2700K CRI 80
2.7KCRI	2700K CRI 90
3.0K	3000K CRI 80
3.0KCRI	3000K CRI 90
4.0K	4000K CRI 80
4.0KCRI	4000K CRI 90

PROFILE COLOUR

BLK	Black (Standard)
WHT	White

WIRING CONFIGURATION PAGE 07

WR2OS	Wire 2+1 Core One Side
SMPLC	Sample Type Connector 2.5mm

IP RATING PAGE 07

IP20	Indoor Use
------	------------


¹ Other CCT subject to availability.

■ ACCESSORIES


	PRODUCT CODE	DESCRIPTION
MOUNTING CLIP ¹		
	MC-STR-CC-BLK	Black Plastic Mounting Clip
	MC-STR-CC-WHT	White Plastic Mounting Clip
	MT-CC	Adhesive double sided mounting tape
¹ One MC-STR-CC or MT-CC required per segment		
DRIVER		
	DRV-DALIPOINT-1X5A	DALI 5 Amps 1 Channel LED Driver
	DRV-DALIPOINT-IP1X10A	DALI 10 Amps 1 Channel Outdoor LED Driver
	DRV-DIMMERPOINT-1X10A	Rotary Wall-Mount LED Driver
	DRV-RDM-P4	DMX / RDM 4 Channel LED Driver
	DRV-RDM-IP-P4	Outdoor DMX / RDM 4 Channel LED Driver
POWER SUPPLY FOR OUTDOOR USE (IP67)		
	PWR-HLG-60H-42AU	Mean Well Power Supply HLG 60W 42V IP67
	PWR-HLG-150H-42AU	Mean Well Power Supply HLG 150W 42V IP67
	PWR-HLG-240H-42AU	Mean Well Power Supply HLG 240W 42V IP67
CABLE EXTENSIONS		
	CBLEXT-STR-WR2-IP40-3M	3m Cable Extension for Strips 1x Red, 1x Black, 0.75mm ² wire
	CBLEXT-STR-WR2-IP40-5M	5m Cable Extension for Strips 1x Red, 1x Black, 0.75mm ² wire
	CBLEXT-STR-OC2-IP65-0.6M	0.6m Connector Extension for Strips 1x Red, 1x Black, 0.75mm ² wires
	CBLEXT-STR-OC2-IP65-3M	3m Connector Extension for Strips 1x Red, 1x Black, 0.75mm ² wires
	CBLEXT-STR-OC2-IP65-5M	5m Connector Extension for Strips 1x Red, 1x Black, 0.75mm ² wires

■ WIRING DIAGRAMS

WITH DALI POINT

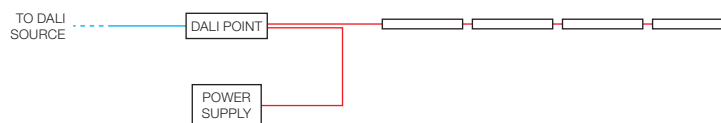

WITH DIMMER POINT

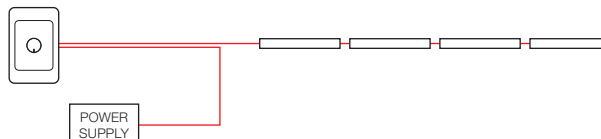

* Please consult Coolon for details on extension cables between LED fittings, drivers and PSUs.